

Robust

5 YEARS WARRANTY



Features

- High reliability light-emitting diodes (LED)
- High luminous efficiency 150LM/W
- Color rendering index - Ra>80
- Emergency battery is optional
- Special formula strong aluminum body
- Water-proof, dust-proof, damp-proof
- Through-wiring 3x1.5mm² or 5x1.5mm²
- Stainless steel mounting brackets
- Easy installation

Applications

- Food industry lighting
- Animal husbandry lighting

Available types


Product Item	Power consumption, W	Color temperature, K	Typical luminous flux, lm	Dimension, m
LTL-R40W-4000K	40W	4000K	4300lm	Ø100x1200 m
LTL-R50W-4000K	50W	4000K	6500lm	Ø100x1200 m
LTL-R60W-4000K	60W	4000K	9000lm	Ø100x1500 m

Technical specification

Luminous efficacy	150lm/W
Length, mm	600 mm 1200mm 1500 mm optional
Protection class	Extremely resistant against chemically aggressive environment. It is resistant to ammonia and corrosive substances. Light fitting is specially designed for animal husbandry



Light curves

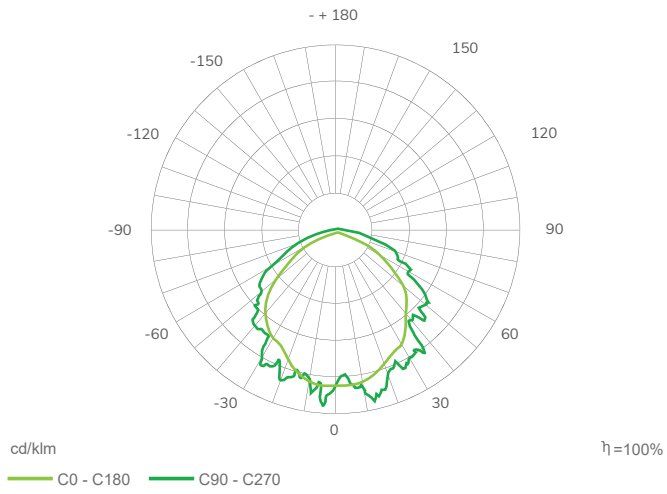

Technical drawing

