


Ufo3

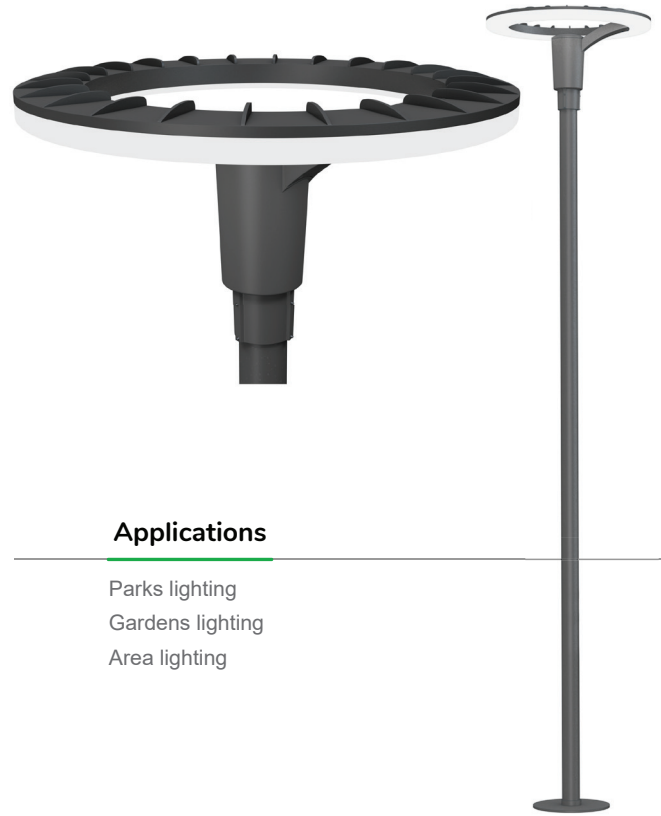

Features

- Made of aluminum polyester powder coated with different finishes and different ral colors, silicone gasket, and tempered glass diffuser.
- CRI>70
- Class I Electrical Protection
- Surge protection (optional): 2kv-6kV
- Polyester Powder Coating finish available in RAL Colors

Applications

- Parks lighting
- Gardens lighting
- Area lighting

Available types

Product Item	Power consumption, W	Color temperature, K	Lumen Output
AL-F-3-40W-3000K 4000K	40W	3000K 4000K	3880 4010 lm
AL-F-3-60W-3000K 4000K	60W	3000K 4000K	5820 6015 lm

Technical specification

LED light source:	220-240V (50-60Hz)
Operating temperature:	-25°C /+55°C
Control System:	1-10V optional
Power factor:	>95
Pole top mount:	Ø60 mm
Dimensions:	524 x 524 x 400 mm

Technical drawing

